



## CC Low Noise Rolly


The CC Low Noise Rolly has the size of half a Europallet and is certified for making deliveries without creating a disturbance in areas where there are restrictions in relation to noise at night. The CC Low Noise Rolly has a noise level of less than 60 dB (A) when rolled.

### Characteristics and benefits

- Ideal for shop floors.
- The CC Low Noise Rolly can be stacked straight away.
- The frame has smooth rounded corners to ensure that manoeuvring is safer and easier.
- The CC Low Noise Rolly is built as a load-bearing frame with two fixed and two castor wheels.
- The CC Low Noise Rolly can be easily moved using pallet trucks, forklift trucks or chain conveyors because of the 4 steel beams that have the same dimensions as the frame.
- Designed to meet the highest hygiene standards.
- Water resistant.
- Complies with the guidelines to be deployed between 7 p.m. and 7 a.m. in accordance with the noise measurements\*.

### How to hand in?

- Always hand in equipment clean and in a functional state.
- Ensure that the wheels are free from rope, plastic and other waste.
- Ensure that all castor wheels are on one side.
- Ensure there is 1 product type per stack.
- Ensure that the wheels of only 1 colour are present per stack.

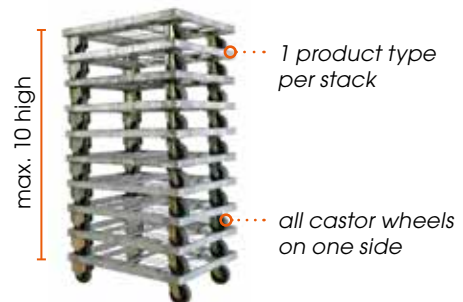

### Do you have equipment that is broken?


You can then hand it in for repair at a repair shop or exchange it for functional equipment.

### Specifications

A = 811mm  
B = 142 mm

C = 182 mm  
D = 605 mm


E = 40 mm

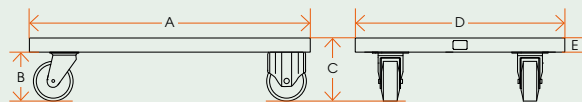

Average weight



400 kg UDL




Accessibility  
(4 sided)



Logo recognition



PIEK certified



Temperature

\*The PIEK standard applies in the following countries: The Netherlands, United Kingdom, France, Germany and Belgium.